

FIREPRO CENTABUILD

HEAD OFFICE: AUCKLAND (09) 579 0367
WELLINGTON (04) 568 7086 • CHRISTCHURCH (03) 379 9364
www.firepro.co.nz sales@firepro.co.nz



Q LON SEALS DATASHEET - AUG08

Product specifications can change. Contact us to ensure you have our latest datasheet


Q LON SEALS

Q Lon is an especially formulated thermoset urethane open cell cushion material with a tough polypropylene cover. Q Lon has been used worldwide for over 25 years.

Q Lon is UV stabilised, compression set resistant, solvent and paint resistant. It has excellent temperature and weather sealing performance and is an effective barrier to air movement. Durability is exceptional.

Q Lon is our premier door and window compression seal product.


KWQ2



SQ2 wing seal insert in an aluminium holder with a cover plate concealing screw fixings. Anodised or painted cover in a wide variety of colours. Seal insert

colour White, Brown or Black. Slotted screw holes allow simple installation or adjustment.


KWQ6



SQ6 block seal insert in similar aluminium holder to KWQ2 with a cover plate concealing screw fixings. Anodised or painted cover in a wide variety of

colours. Seal insert colour White, Brown or Black. Slotted screw holes allow simple installation or adjustment. SQ6 is held slightly back away from door frame.


KNQ6



Aluminium holder holds the SQ6 seal insert slightly towards the door frame. The holder has concealed screw holes slotted for simple installation and


adjustment. Anodised, Natural or Bronze, or painted White or Black holder finish available. Seal insert available in White, Black & Brown.

hHQ6




Anodised or painted aluminium carrier with SQ6 insert. Screw or adhesive tape application.

hPQ6




Brown or White PVC holder with colour matched or contrasting Black SQ6 inserted Tack or adhesive application.




Brown or White PVC holder with colour matched or contrasting Black SQ2 insert Tack or adhesive application.

ULQ6

Anodised Silver aluminium carrier with twin SQ6 seals

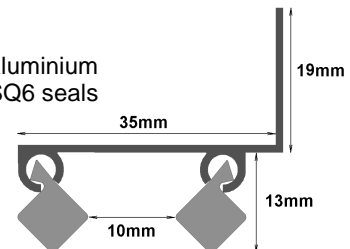


SQ2



Aquamac kerf seal requires 2.7mm wide x 6mm deep kerf/groove.

SQ6



Kerf seal requires 2.7mm wide x 6mm deep kerf/groove.

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. They should not however be construed as controlling suggestions and there is no warranty of performance of our materials either expressed or implied. We urge that users of our materials conduct confirmatory tests to determine final suitability for their specific end uses. All dimensions are nominal. We reserve the right to make changes or to withdraw designs and products without notice.